

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**

THIS PAGE BLANK (USPTO)

PATENT SPECIFICATION

903,287

DRAWINGS ATTACHED.



*Date of Application and filing Complete Specification :
Oct. 14, 1959. No. 34848/59.*

*Application made in United States of America (No. 775,834)
on Nov. 24, 1958.*

(Patent of Addition to No. 859,862, dated Feb. 19, 1959).

Complete Specification Published : Aug. 15, 1962.

Index at Abstracts : Class 28/9 D/2 2A 4 6A 6B 6D 6E 6F 6G 6H 6I 6J 6K 6L 6M 6N 6O 6P 6Q 6R 6S 6T 6U 6V 6W 6X 6Y 6Z 6AA 6AB 6AC 6AD 6AE 6AF 6AG 6AH 6AI 6AJ 6AK 6AL 6AM 6AN 6AO 6AP 6AQ 6AR 6AS 6AT 6AU 6AV 6AW 6AX 6AY 6AZ 6BA 6BB 6BC 6BD 6BE 6BF 6BG 6BH 6BI 6BJ 6BK 6BL 6BM 6BN 6BO 6BP 6BQ 6BR 6BS 6BT 6BU 6BV 6BW 6BX 6BY 6BZ 6CA 6CB 6CC 6CD 6CE 6CF 6CG 6CH 6CI 6CJ 6CK 6CL 6CM 6CN 6CO 6CP 6CQ 6CR 6CS 6CT 6CU 6CV 6CW 6CX 6CY 6CZ 6DA 6DB 6DC 6DD 6DE 6DF 6DG 6DH 6DI 6DJ 6DK 6DL 6DM 6DN 6DO 6DP 6DQ 6DR 6DS 6DT 6DU 6DV 6DW 6DX 6DY 6DZ 6EA 6EB 6EC 6ED 6EE 6EF 6EG 6EH 6EI 6EJ 6EK 6EL 6EM 6EN 6EO 6EP 6EQ 6ER 6ES 6ET 6EU 6EV 6EW 6EX 6EY 6EZ 6FA 6FB 6FC 6FD 6FE 6FF 6FG 6FH 6FI 6FJ 6FK 6FL 6FM 6FN 6FO 6FP 6FQ 6FR 6FS 6FT 6FU 6FV 6FW 6FX 6FY 6FZ 6GA 6GB 6GC 6GD 6GE 6GF 6GG 6GH 6GI 6GJ 6GK 6GL 6GM 6GN 6GO 6GP 6GQ 6GR 6GS 6GT 6GU 6GV 6GW 6GX 6GY 6GZ 6HA 6HB 6HC 6HD 6HE 6HF 6HG 6HH 6HI 6HJ 6HK 6HL 6HM 6HN 6HO 6HP 6HQ 6HR 6HS 6HT 6HU 6HV 6HW 6HX 6HY 6HZ 6IA 6IB 6IC 6ID 6IE 6IF 6IG 6IH 6II 6IJ 6IK 6IL 6IM 6IN 6IO 6IP 6IQ 6IR 6IS 6IT 6IU 6IV 6IW 6IX 6IY 6IZ 6JA 6JB 6JC 6JD 6JE 6JF 6JG 6JH 6JI 6JJ 6JK 6JL 6JM 6JN 6JO 6JP 6JQ 6JR 6JS 6JT 6JU 6JV 6JW 6JX 6JY 6JZ 6KA 6KB 6KC 6KD 6KE 6KF 6KG 6KH 6KI 6KJ 6KK 6KL 6KM 6KN 6KO 6KP 6KQ 6KR 6KS 6KT 6KU 6KV 6KW 6KX 6KY 6KZ 6LA 6LB 6LC 6LD 6LE 6LF 6LG 6LH 6LI 6LJ 6LK 6LM 6LN 6LO 6LP 6LQ 6LR 6LS 6LT 6LU 6LV 6LW 6LX 6LY 6LZ 6MA 6MB 6MC 6MD 6ME 6MF 6MG 6MH 6MI 6MJ 6MK 6ML 6MM 6MN 6MO 6MP 6MQ 6MR 6MS 6MT 6MU 6MV 6MW 6MX 6MY 6MZ 6NA 6NB 6NC 6ND 6NE 6NF 6NG 6NH 6NI 6NJ 6NK 6NL 6NM 6NN 6NO 6NP 6NQ 6NR 6NS 6NT 6NU 6NV 6NW 6NX 6NY 6NZ 6OA 6OB 6OC 6OD 6OE 6OF 6OG 6OH 6OI 6OJ 6OK 6OL 6OM 6ON 6OO 6OP 6OQ 6OR 6OS 6OT 6OU 6OV 6OW 6OX 6OY 6OZ 6PA 6PB 6PC 6PD 6PE 6PF 6PG 6PH 6PI 6PJ 6PK 6PL 6PM 6PN 6PO 6PP 6PQ 6PR 6PS 6PT 6PU 6PV 6PW 6PX 6PY 6PZ 6QA 6QB 6QC 6QD 6QE 6QF 6QG 6QH 6QI 6QJ 6QK 6QL 6QM 6QN 6QO 6QP 6QQ 6QR 6QS 6QT 6QU 6QV 6QW 6QX 6QY 6QZ 6RA 6RB 6RC 6RD 6RE 6RF 6RG 6RH 6RI 6RJ 6RK 6RL 6RM 6RN 6RO 6RP 6RQ 6RR 6RS 6RT 6RU 6RV 6RW 6RX 6RY 6RZ 6SA 6SB 6SC 6SD 6SE 6SF 6SG 6SH 6SI 6SJ 6SK 6SL 6SM 6SN 6SO 6SP 6SQ 6SR 6SS 6ST 6SU 6SV 6SW 6SX 6SY 6SZ 6TA 6TB 6TC 6TD 6TE 6TF 6TG 6TH 6TI 6TJ 6TK 6TL 6TM 6TN 6TO 6TP 6TQ 6TR 6TS 6TT 6TU 6TV 6TW 6TX 6TY 6TZ 6UA 6UB 6UC 6UD 6UE 6UF 6UG 6UH 6UI 6UJ 6UK 6UL 6UM 6UN 6UO 6UP 6UQ 6UR 6US 6UT 6UU 6UV 6UW 6UX 6UY 6UZ 6VA 6VB 6VC 6VD 6VE 6VF 6VG 6VH 6VI 6VJ 6VK 6VL 6VM 6VN 6VO 6VP 6VQ 6VR 6VS 6VT 6VU 6VV 6VW 6VX 6VY 6VZ 6WA 6WB 6WC 6WD 6WE 6WF 6WG 6WH 6WI 6WJ 6WK 6WL 6WM 6WN 6WO 6WP 6WQ 6WR 6WS 6WT 6WU 6WV 6WW 6WX 6WY 6WZ 6XA 6XB 6XC 6XD 6XE 6XF 6XG 6XH 6XI 6XJ 6XK 6XL 6XM 6XN 6XO 6XP 6XQ 6XR 6XS 6XT 6XU 6XV 6XW 6XX 6XY 6XZ 6YA 6YB 6YC 6YD 6YE 6YF 6YG 6YH 6YI 6YJ 6YK 6YL 6YM 6YN 6YO 6YP 6YQ 6YR 6YS 6YT 6YU 6YV 6YW 6YX 6YY 6YZ 6ZA 6ZB 6ZC 6ZD 6ZE 6ZF 6ZG 6ZH 6ZI 6ZJ 6ZK 6ZL 6ZM 6ZN 6ZO 6ZP 6ZQ 6ZR 6ZS 6ZT 6ZU 6ZV 6ZW 6ZX 6ZY 6ZZ 7A 7B 7C 7D 7E 7F 7G 7H 7I 7J 7K 7L 7M 7N 7O 7P 7Q 7R 7S 7T 7U 7V 7W 7X 7Y 7Z 8A 8B 8C 8D 8E 8F 8G 8H 8I 8J 8K 8L 8M 8N 8O 8P 8Q 8R 8S 8T 8U 8V 8W 8X 8Y 8Z 9A 9B 9C 9D 9E 9F 9G 9H 9I 9J 9K 9L 9M 9N 9O 9P 9Q 9R 9S 9T 9U 9V 9W 9X 9Y 9Z 10A 10B 10C 10D 10E 10F 10G 10H 10I 10J 10K 10L 10M 10N 10O 10P 10Q 10R 10S 10T 10U 10V 10W 10X 10Y 10Z 11A 11B 11C 11D 11E 11F 11G 11H 11I 11J 11K 11L 11M 11N 11O 11P 11Q 11R 11S 11T 11U 11V 11W 11X 11Y 11Z 12A 12B 12C 12D 12E 12F 12G 12H 12I 12J 12K 12L 12M 12N 12O 12P 12Q 12R 12S 12T 12U 12V 12W 12X 12Y 12Z 13A 13B 13C 13D 13E 13F 13G 13H 13I 13J 13K 13L 13M 13N 13O 13P 13Q 13R 13S 13T 13U 13V 13W 13X 13Y 13Z 14A 14B 14C 14D 14E 14F 14G 14H 14I 14J 14K 14L 14M 14N 14O 14P 14Q 14R 14S 14T 14U 14V 14W 14X 14Y 14Z 15A 15B 15C 15D 15E 15F 15G 15H 15I 15J 15K 15L 15M 15N 15O 15P 15Q 15R 15S 15T 15U 15V 15W 15X 15Y 15Z 16A 16B 16C 16D 16E 16F 16G 16H 16I 16J 16K 16L 16M 16N 16O 16P 16Q 16R 16S 16T 16U 16V 16W 16X 16Y 16Z 17A 17B 17C 17D 17E 17F 17G 17H 17I 17J 17K 17L 17M 17N 17O 17P 17Q 17R 17S 17T 17U 17V 17W 17X 17Y 17Z 18A 18B 18C 18D 18E 18F 18G 18H 18I 18J 18K 18L 18M 18N 18O 18P 18Q 18R 18S 18T 18U 18V 18W 18X 18Y 18Z 19A 19B 19C 19D 19E 19F 19G 19H 19I 19J 19K 19L 19M 19N 19O 19P 19Q 19R 19S 19T 19U 19V 19W 19X 19Y 19Z 20A 20B 20C 20D 20E 20F 20G 20H 20I 20J 20K 20L 20M 20N 20O 20P 20Q 20R 20S 20T 20U 20V 20W 20X 20Y 20Z 21A 21B 21C 21D 21E 21F 21G 21H 21I 21J 21K 21L 21M 21N 21O 21P 21Q 21R 21S 21T 21U 21V 21W 21X 21Y 21Z 22A 22B 22C 22D 22E 22F 22G 22H 22I 22J 22K 22L 22M 22N 22O 22P 22Q 22R 22S 22T 22U 22V 22W 22X 22Y 22Z 23A 23B 23C 23D 23E 23F 23G 23H 23I 23J 23K 23L 23M 23N 23O 23P 23Q 23R 23S 23T 23U 23V 23W 23X 23Y 23Z 24A 24B 24C 24D 24E 24F 24G 24H 24I 24J 24K 24L 24M 24N 24O 24P 24Q 24R 24S 24T 24U 24V 24W 24X 24Y 24Z 25A 25B 25C 25D 25E 25F 25G 25H 25I 25J 25K 25L 25M 25N 25O 25P 25Q 25R 25S 25T 25U 25V 25W 25X 25Y 25Z 26A 26B 26C 26D 26E 26F 26G 26H 26I 26J 26K 26L 26M 26N 26O 26P 26Q 26R 26S 26T 26U 26V 26W 26X 26Y 26Z 27A 27B 27C 27D 27E 27F 27G 27H 27I 27J 27K 27L 27M 27N 27O 27P 27Q 27R 27S 27T 27U 27V 27W 27X 27Y 27Z 28A 28B 28C 28D 28E 28F 28G 28H 28I 28J 28K 28L 28M 28N 28O 28P 28Q 28R 28S 28T 28U 28V 28W 28X 28Y 28Z 29A 29B 29C 29D 29E 29F 29G 29H 29I 29J 29K 29L 29M 29N 29O 29P 29Q 29R 29S 29T 29U 29V 29W 29X 29Y 29Z 30A 30B 30C 30D 30E 30F 30G 30H 30I 30J 30K 30L 30M 30N 30O 30P 30Q 30R 30S 30T 30U 30V 30W 30X 30Y 30Z 31A 31B 31C 31D 31E 31F 31G 31H 31I 31J 31K 31L 31M 31N 31O 31P 31Q 31R 31S 31T 31U 31V 31W 31X 31Y 31Z 32A 32B 32C 32D 32E 32F 32G 32H 32I 32J 32K 32L 32M 32N 32O 32P 32Q 32R 32S 32T 32U 32V 32W 32X 32Y 32Z 33A 33B 33C 33D 33E 33F 33G 33H 33I 33J 33K 33L 33M 33N 33O 33P 33Q 33R 33S 33T 33U 33V 33W 33X 33Y 33Z 34A 34B 34C 34D 34E 34F 34G 34H 34I 34J 34K 34L 34M 34N 34O 34P 34Q 34R 34S 34T 34U 34V 34W 34X 34Y 34Z 35A 35B 35C 35D 35E 35F 35G 35H 35I 35J 35K 35L 35M 35N 35O 35P 35Q 35R 35S 35T 35U 35V 35W 35X 35Y 35Z 36A 36B 36C 36D 36E 36F 36G 36H 36I 36J 36K 36L 36M 36N 36O 36P 36Q 36R 36S 36T 36U 36V 36W 36X 36Y 36Z 37A 37B 37C 37D 37E 37F 37G 37H 37I 37J 37K 37L 37M 37N 37O 37P 37Q 37R 37S 37T 37U 37V 37W 37X 37Y 37Z 38A 38B 38C 38D 38E 38F 38G 38H 38I 38J 38K 38L 38M 38N 38O 38P 38Q 38R 38S 38T 38U 38V 38W 38X 38Y 38Z 39A 39B 39C 39D 39E 39F 39G 39H 39I 39J 39K 39L 39M 39N 39O 39P 39Q 39R 39S 39T 39U 39V 39W 39X 39Y 39Z 40A 40B 40C 40D 40E 40F 40G 40H 40I 40J 40K 40L 40M 40N 40O 40P 40Q 40R 40S 40T 40U 40V 40W 40X 40Y 40Z 41A 41B 41C 41D 41E 41F 41G 41H 41I 41J 41K 41L 41M 41N 41O 41P 41Q 41R 41S 41T 41U 41V 41W 41X 41Y 41Z 42A 42B 42C 42D 42E 42F 42G 42H 42I 42J 42K 42L 42M 42N 42O 42P 42Q 42R 42S 42T 42U 42V 42W 42X 42Y 42Z 43A 43B 43C 43D 43E 43F 43G 43H 43I 43J 43K 43L 43M 43N 43O 43P 43Q 43R 43S 43T 43U 43V 43W 43X 43Y 43Z 44A 44B 44C 44D 44E 44F 44G 44H 44I 44J 44K 44L 44M 44N 44O 44P 44Q 44R 44S 44T 44U 44V 44W 44X 44Y 44Z 45A 45B 45C 45D 45E 45F 45G 45H 45I 45J 45K 45L 45M 45N 45O 45P 45Q 45R 45S 45T 45U 45V 45W 45X 45Y 45Z 46A 46B 46C 46D 46E 46F 46G 46H 46I 46J 46K 46L 46M 46N 46O 46P 46Q 46R 46S 46T 46U 46V 46W 46X 46Y 46Z 47A 47B 47C 47D 47E 47F 47G 47H 47I 47J 47K 47L 47M 47N 47O 47P 47Q 47R 47S 47T 47U 47V 47W 47X 47Y 47Z 48A 48B 48C 48D 48E 48F 48G 48H 48I 48J 48K 48L 48M 48N 48O 48P 48Q 48R 48S 48T 48U 48V 48W 48X 48Y 48Z 49A 49B 49C 49D 49E 49F 49G 49H 49I 49J 49K 49L 49M 49N 49O 49P 49Q 49R 49S 49T 49U 49V 49W 49X 49Y 49Z 50A 50B 50C 50D 50E 50F 50G 50H 50I 50J 50K 50L 50M 50N 50O 50P 50Q 50R 50S 50T 50U 50V 50W 50X 50Y 50Z 51A 51B 51C 51D 51E 51F 51G 51H 51I 51J 51K 51L 51M 51N 51O 51P 51Q 51R 51S 51T 51U 51V 51W 51X 51Y 51Z 52A 52B 52C 52D 52E 52F 52G 52H 52I 52J 52K 52L 52M 52N 52O 52P 52Q 52R 52S 52T 52U 52V 52W 52X 52Y 52Z 53A 53B 53C 53D 53E 53F 53G 53H 53I 53J 53K 53L 53M 53N 53O 53P 53Q 53R 53S 53T 53U 53V 53W 53X 53Y 53Z 54A 54B 54C 54D 54E 54F 54G 54H 54I 54J 54K 54L 54M 54N 54O 54P 54Q 54R 54S 54T 54U 54V 54W 54X 54Y 54Z 55A 55B 55C 55D 55E 55F 55G 55H 55I 55J 55K 55L 55M 55N 55O 55P 55Q 55R 55S 55T 55U 55V 55W 55X 55Y 55Z 56A 56B 56C 56D 56E 56F 56G 56H 56I 56J 56K 56L 56M 56N 56O 56P 56Q 56R 56S 56T 56U 56V 56W 56X 56Y 56Z 57A 57B 57C 57D 57E 57F 57G 57H 57I 57J 57K 57L 57M 57N 57O 57P 57Q 57R 57S 57T 57U 57V 57W 57X 57Y 57Z 58A 58B 58C 58D 58E 58F 58G 58H 58I 58J 58K 58L 58M 58N 58O 58P 58Q 58R 58S 58T 58U 58V 58W 58X 58Y 58Z 59A 59B 59C 59D 59E 59F 59G 59H 59I 59J 59K 59L 59M 59N 59O 59P 59Q 59R 59S 59T 59U 59V 59W 59X 59Y 59Z 60A 60B 60C 60D 60E 60F 60G 60H 60I 60J 60K 60L 60M 60N 60O 60P 60Q 60R 60S 60T 60U 60V 60W 60X 60Y 60Z 61A 61B 61C 61D 61E 61F 61G 61H 61I 61J 61K 61L 61M 61N 61O 61P 61Q 61R 61S 61T 61U 61V 61W 61X 61Y 61Z 62A 62B 62C 62D 62E 62F 62G 62H 62I 62J 62K 62L 62M 62N 62O 62P 62Q 62R 62S 62T 62U 62V 62W 62X 62Y 62Z 63A 63B 63C 63D 63E 63F 63G 63H 63I 63J 63K 63L 63M 63N 63O 63P 63Q 63R 63S 63T 63U 63V 63W 63X 63Y 63Z 64A 64B 64C 64D 64E 64F 64G 64H 64I 64J 64K 64L 64M 64N 64O 64P 64Q 64R 64S 64T 64U 64V 64W 64X 64Y 64Z 65A 65B 65C 65D 65E 65F 65G 65H 65I 65J 65K 65L 65M 65N 65O 65P 65Q 65R 65S 65T 65U 65V 65W 65X 65Y 65Z 66A 66B 66C 66D 66E 66F 66G 66H 66I 66J 66K 66L 66M 66N 66O 66P 66Q 66R 66S 66T 66U 66V 66W 66X 66Y 66Z 67A 67B 67C 67D 67E 67F 67G 67H 67I 67J 67K 67L 67M 67N 67O 67P 67Q 67R 67S 67T 67U 67V 67W 67X 67Y 67Z 68A 68B 68C 68D 68E 68F 68G 68H 68I 68J 68K 68L 68M 68N 68O 68P 68Q 68R 68S 68T 68U 68V 68W 68X 68Y 68Z 69A 69B 69C 69D 69E 69F 69G 69H 69I 69J 69K 69L 69M 69N 69O 69P 69Q 69R 69S 69T 69U 69V 69W 69X 69Y 69Z 70A 70B 70C 70D 70E 70F 70G 70H 70I 70J 70K 70L 70M 70N 70O 70P 70Q 70R 70S 70T 70U 70V 70W 70X 70Y 70Z 71A 71B 71C 71D 71E 71F 71G 71H 71I 71J 71K 71L 71M 71N 71O 71P 71Q 71R 71S 71T 71U 71V 71W 71X 71Y 71Z 72A 72B 72C 72D 72E 72F 72G 72H 72I 72J 72K 72L 72M 72N 72O 72P 72Q 72R 72S 72T 72U 72V 72W 72X 72Y 72Z 73A 73B 73C 73D 73E 73F 73G 73H 73I 73J 73K 73L 73M 73N 73O 73P 73Q 73R 73S 73T 73U 73V 73W 73X 73Y 73Z 74A 74B 74C 74D 74E 74F 74G 74H 74I 74J 74K 74L 74M 74N 74O 74P 74Q 74R 74S 74T 74U 74V 74W 74X 74Y 74Z 75A 75B 75C 75D 75E 75F 75G 75H 75I 75J 75K 75L 75M 75N 75O 75P 75Q 75R 75S 75T 75U 75V 75W 75X 75Y 75Z 76A 76B 76C 76D 76E 76F 76G 76H 76I 76J 76K 76L 76M 76N 76O 76P 76Q 76R 76S 76T 76U 76V 76W 76X 76Y 76Z 77A 77B 77C 77D 77E 77F 77G 77H 77I 77J 77K 77L 77M 77N 77O 77P 77Q 77R 77S 77T 77U 77V 77W 77X 77Y 77Z 78A 78B 78C 78D 78E 78F 78G 78H 78I 78J 78K 78L 78M 78N 78O 78P 78Q 78R 78S 78T 78U 78V 78W 78X 78Y 78Z 79A 79B 79C 79D 79E 79F 79G 79H 79I 79J 79K 79L 79M 79N 79O 79P 79Q 79R 79S 79T 79U 79V 79W 79X 79Y 79Z 80A 80B 80C 80D 80E 80F 80G 80H 80I 80J 80K 80L 80M 80N 80O 80P 80Q 80R 80S 80T 80U 80V 80W 80X 80Y 80Z 81A 81B 81C 81D 81E 81F 81G 81H 81I 81J 81K 81L 81M 81N 81O 81P 81Q 81R 81S 81T 81U 81V 81W 81X 81Y 81Z 82A 82B 82C 82D 82E 82F 82G 82H 82I 82J 82K 82L 82M 82N 82O 82P 82Q 82R 82S 82T 82U 82V 82W 82X 82Y 82Z 83A 83B 83C 83D 83E 83F 83G 83H 83I 83J 83K 83L 83M 83N 83O 83P 83Q 83R 83S 83T 83U 83V 83W 83X 83Y 83Z 84A 84B 84C 84D 84E 84F 84G 84H 84I 84J 84K 84L 84M 84N 84O 84P 84Q 84R 84S 84T 84U 84V 84W 84X 84Y 84Z 85A 85B 85C 85D 85E 85F 85G 85H 85I 85J 85K 85L 85M 85N 85O 85P 85Q 85R 85S 85T 85U 85V 85W 85X 85Y 85Z 86A 86B 86C 86D 86E 86F 86G 86H 86I 86J 86K 86L 86M 86N 86O 86P 86Q 86R 86S 86T 86U 86V 86W 86X 86Y 86Z 87A 87B 87C 87D 87E 87F 87G 87H 87I 87J 87K 87L 87M 87N 87O 87P 87Q 87R 87S 87T 87U 87V 87W 87X 87Y 87Z 88A 88B 88C 88D 88E 88F 88G 88H 88I 88J 88K 88L 88M 88N 88O 88P 88Q 88R 88S 88T 88U 88V 88W 88X 88Y 88Z 89A 89B 89C 89D 89E 89F 89G 89H 89I 89J 89K 89L 89M 89N 89O 89P 89Q 89R 89S 89T 89U 89V 89W 89X 89Y 89Z 90A 90B 90C 90D 90E 90F 90G 90H 90I 90J 90K 90L 90M 90N 90O 90P 90Q 90R 90S 90T 90U 90V 90W 90X 90Y 90Z 91A 91B 91C 91D 91E 91F 91G 91H 91I 91J 91K 91L 91M 91N 91O 91P 91Q 91R 91S 91T 91U 91V 91W 91X 91Y 91Z 92A 92B 92C 92D 92E 92F 92G 92H 92I 92J 92K 92L 92M 92N 92O 92P 92Q 92R 92S 92T 92U 92V 92W 92X 92Y 92Z 93A 93B 93C 93D 93E 93F 93G 93H 93I 93J 93K 93L 93M 93N 93O 93P 93Q 93R 93S 93T 93U 93V 93W 93X 93Y 93Z 94A 94B 94C 94D 94E 94F 94G 94H 94I 94J 94K 94L 94M 94N 94O 94P 94Q 94R 94S 94T 94U 94V 94W 94X 94Y 94Z 95A 95B 95C 95D 95E 95F 95G 95H 95I 95J 95K 95L 95M 95N 95O 95P 95Q 95R 95S 95T 95U 95V 95W 95X 95Y 95Z 96A 96B 96C 96D 96E 96F 96G 96H 96I 96J 96K 96L 96M 96N 96O 96P 96Q 96R 96S 96T 96U 96V 96W 96X 96Y 96Z 97A 97B 97C 97D 97E 97F 97G 97H 97I 97J 97K 97L 97M 97N 97O 97P 97Q 97R 97S 97T 97U 97V 97W 97X 97Y 97Z 98A 98B 98C 98D 98E 98F 98G 98H 98I 98J 98K 98L 98M 98N 98O 98P 98Q 98R 98S 98T 98U 98V 98W 98X 98Y 98Z 99A 99B 99C 99D 99E 99F 99G 99H 99I 99J 99K 99L 99M 99N 99O 99P 99Q 99R 99S 99T 99U 99V 99W 99X 99Y 99Z 100A 100B 100C 100D 100E 100F 100G 100H 100I 100J 100K

PATENT SPECIFICATION

903,287

DRAWINGS ATTACHED.



Date of Application and filing Complete Specification :

Oct. 14, 1959.

No. 34848/59.

Application made in United States of America (No. 775,834)

on Nov. 24, 1958.

(Patent of Addition to No. 859,862, dated Feb. 19, 1959).

Complete Specification Published : Aug. 15, 1962.

Index at Acceptance :—Classes 38(2), D(2:3A:4:6A:6B:8B:8D); 29, H5; 35, P5; 44, BE19; and 122(3), N1(B:G).

International Classification:—H01d. E05c. F06j. F25d. H01d.

COMPLETE SPECIFICATION.

Flexible Magnet.

We, THE B.F. GOODRICH COMPANY, a corporation organised under the laws of the State of New York, United State of America, of 230 Park Avenue, New York, New York, United States of America, do hereby declare the invention, for which we pray that a patent may be granted to us, and the method by which it is to be performed, to be particularly described in and by the following statement:—

This invention relates to a flexible magnet which is able to hold itself against a magnetically permeable article and relates also to a gasket containing such a magnet for use in refrigerators and similar cabinets. The invention constitutes an improvement on that disclosed in our Application No. 5782/59, (Serial No. 859,862).

As mentioned in that Application, refrigerators, especially those of the type used in the home, employ a gasket or sealing means between the door and the body of the cabinet to cushion the door in closing, to prevent the passage of air when the door is closed and provide a heat-insulating barrier in this region. These gaskets are generally formed of rubber, synthetic plastic or other elastomeric material which have rubber-like properties so they can deform under pressure and thereby provide a seal between the cabinet and the door even though there be irregularities in the surfaces of these members. Heretofore, it has been customary to form the gasket of a material and in a configuration such that considerable pressure is required to deform the gasket sufficiently to provide effective sealing action around the entire door opening. This has made it necessary to utilize door latches which produce a strong clamping

force. In an effort to avoid the need for such latches, attempts have been made to employ door gaskets requiring only a light compressive force to effect conformation to the surfaces engaged, this force being supplied by magnetic means. Although such magnetic door gaskets have many advantages over the conventional combination of latch and stiff gasket, nevertheless, they have not heretofore received wide acceptance. This is partly because the gaskets in some cases have not provided the necessary sealing action but more importantly because the cost of manufacture has been excessive.

The success of a gasket in providing effective sealing action for refrigerators or similar cabinets depends in a large measure upon its ability to deform sufficiently to accommodate the unavoidable irregularities in the adjacent surfaces of the cabinet and door between which the gasket is placed. In order to permit such accommodation, the magnet disclosed in our above mentioned Application was formed as a series of short magnetised blocks which are held together in a flexible fashion by adhering them in face-to-face contact to an elongated flexible strip. Such a magnet system tends to be more expensive than is desirable.

The present invention is concerned with improving or modifying this magnet by deriving its flexibility not from the splitting up of the magnetic material into blocks but instead from the inherent characteristics of the material employed, so that both the formation of blocks and the need to employ a supporting flexible strip are avoided, and according to this invention, a flexible magnet is provided comprising finely di-

vided particles of barium ferrite or a ferrite of equivalent magnetic retentive properties, the ferrite being bonded together by a thermoplastic resin containing a plasticiser so as to make up a self-supporting body of minimum dimension greater than the thickness of a magnetic recording tape, the body being magnetised in such a manner and to such a degree as to constitute a permanent magnet able to hold itself against a magnetically permeable article, the particles being present in the body in the range of 30% to 93% of the total weight of the magnet and the size of the particles being such that they will all pass through a screen the openings of which have a transverse dimension of the order of 0.0017 inches. Such a magnet is readily and cheaply made and does not depend for its flexibility upon a separate flexible supporting strip. In addition, the magnet may be provided with any desired arrangement of magnetised poles. This permits many uses for the magnet in addition to incorporation in gaskets for refrigerators or similar cabinets.

When incorporated in a gasket for a refrigerator, the gasket preferably comprises an elongated flexible body having a longitudinally extending portion for attaching to the door of the cabinet, a portion carrying the flexible magnet, whose function is to attract the cabinet body, and an intermediate portion which is integral with the other portions and which permits of a relative movement between them to allow the magnet to take up different longitudinal configurations with respect to the attaching portion. The magnet is arranged to extend along the flexible body of the gasket and is able to take up its different longitudinal configurations to accommodate irregularities in the cooperating surfaces of the door and the cabinet body.

When employed on a cabinet, such a gasket is made as an endless gasket to serve as a seal between the door and the periphery of the cabinet body around its opening, and the gasket serves to hold the door, when closed, against the cabinet body.

An example of a magnet according to the invention, and also examples of a gasket and a refrigerator incorporating such a magnet, will now be described with reference to the accompanying drawings in which:—

Fig. 1 is a front elevational view of a refrigerator with the door in open position and showing a gasket provided with permanent magnets in accordance with this invention;

Fig. 2 is a cross section through the magnet-containing gasket detached from the refrigerator, the view being taken substantially on the line 2—2 of Fig. 1 as viewed in the direction indicated by the arrows;

Fig. 3 is a view similar to Fig. 2 but taken substantially on the line 3—3 of Fig. 1 as viewed in the direction indicated by the arrows; and

Fig. 4 is a fragmentary perspective view showing a portion of a flexible magnetic strip embodying the invention.

A refrigerator 10 of conventional construction is illustrated in Fig. 1 as comprising a cabinet body or member 11 providing a storage compartment the opening of which is closable by a door 12 that is swingably mounted on the cabinet by hinges 13 and 14. The cabinet and door contain magnetically permeable material since the shell of both of these members is formed of sheet iron or steel. The opening to the storage compartment is sealed when the door is closed by a gasket member 15 which is here shown as mounted upon the door 12 in peripherally continuous substantially rectangular configuration with reaches of the gasket extending along each side of the cabinet opening the door is closed.

The gasket 15 performs the dual function of a door seal and a latch. This is achieved by providing one or more of the reaches of the gasket with a permanent magnet 16 which extends as a single continuous length longitudinally of a reach of the gasket. The magnet 16 is provided in strip form and is flexible transversely of its length. The gasket is also formed of flexible material and has a configuration such that a portion thereof can deform when a compressive force is applied, the magnet being so located in the gasket that it is normally spaced from the attached side of the latter by flexible portions or walls of the latter. This insures complete sealing of the space between the cabinet and door when the latter is closed since the magnet holds the gasket to the cabinet and the flexible nature of the gasket and magnet permit them to accommodate to irregularities of the door and cabinet body.

The gasket 15 may take a variety of configurations. As here shown, however, this gasket comprises interconnected, longitudinally extending flexible wall portions 17, 18, 19 and 20 defining a longitudinally extending pocket or compartment 21 for the flexible magnetic strip 16 which pocket or compartment is connected at its opposite sides to a longitudinally extending flexible base portion 22 by flexible spaced longitudinally extending intermediate members or portions 23 and 24. The base portion 22 is preferably thicker than the wall members or portions 17, 18, 19, 20, 23 and 24 and is integral with a strip portion 25, the gasket being attached to the door, for example, by fitting a strip, carried by the door, between the portions 22 and 25, which thus constitute an attaching portion. Al-

ternatively, the portion 25 itself may be screwed to the door. The entire gasket, including the attaching portion, is preferably formed by extrusion from suitable elastomeric material as, for example, plasticized polyvinyl chloride.

In the illustrated embodiment, the members or portions 23 and 24 of the gasket are shown as having the edge regions thereof opposite the base member or portion 22, deflected laterally and forming with the wall portion 17 the outer wall of the gasket which contacts the cabinet body when the door is closed. There is thus provided a longitudinally extending hollow body with an interior of generally rectangular shape in cross section and with the pocket or compartment 21 contained therein behind the front or sealing wall 17 of the gasket. However, the members or portions 23 and 24

may be connected to the walls of pocket 21 at other locations if desired, for example at the respective edges of the wall 20, the function of the members 23 and 24 being that of providing a flexible and resilient support for the magnet-containing pocket or compartment upon the portions 22 and 25 so that the pocket can have limited movement relative to the portions 22 and 25 when the door is opened and closed.

The magnet member 16 comprises a finely-divided ferrite united by a binder which is a plasticized thermoplastic resin, preferably a plasticized vinyl resin. The following is a typical example of one suitable composition, the several materials being expressed in terms of parts by weight based upon 100 parts of the resin and also as a percentage of the total weight of the material:—

	<i>Material</i>	<i>Parts by weight</i>	<i>Percentage of Total Weight</i>
	Polyvinyl chloride	100	5.71
	Dioctyl phthalate	82	4.69
45	Barium ferrite powder	1560	89.19
	Barium cadmium laurate	2.34	.13
	Triphenyl phosphate	1.26	.07
	Low molecular weight polyethylene	3.64	.21
		1749.24	100.00

The barium ferrite powder is in finely-divided condition such that the particle sizes are in the order of a few microns, preferably in the range of 3 to 4 microns. One way in which the proper particle size may be determined readily is by providing the ferrite in sufficient fineness that it all passes through a U.S. Standard Screen of 235 mesh, that is a screen the openings of which have a transverse dimension of the order of 0.0017 inches. The dioctyl phthalate is a plasticizer for the polyvinyl chloride, the barium cadmium laurate and the triphenyl phosphate are provided as stabilizers for the polyvinyl chloride, and the polyethylene of low molecular weight serves as a lubricant during the extrusion of the material to form the elongated strip.

In preparing the magnet 16 the above-identified ingredients are tumbled in a suitable container to mix them and thereafter the mixture is placed on a mill of the type used for milling rubber. The rolls of the mill are heated to an appropriate temperature so that the mixture reaches a temperature of approximately 280° F. and is milled for approximately 20 minutes when the size of the batch is of the order of 100 pounds. This operation produces a flexible sheet of the material which is then granulated and fed to an extruding machine having a suitable die to provide the extruded

material with the desired cross-sectional dimensions. The material issues from the extruder in an elongated continuous self-supporting strip and may be coiled because of its flexible self-supporting nature. The magnetic material is magnetized by conventional equipment in such a manner and to such a degree as to constitute a permanent magnet. The magnetic operation may be performed either before the material is cut to length or just prior to incorporation of the magnet in a gasket.

An alternative mode of preparing the magnetic material 16 is to form a pre-mix of all the ingredients except the ferrite and put this pre-mix upon a mill with the barium ferrite being added upon the mill when the other ingredients have reached a plastic condition and adhere together. A still different mode of preparing the material is to make a master batch of all the ingredients except the barium ferrite in a Banbury mixer, commonly employed for rubber compounding, and then add the barium ferrite to the master batch with subsequent milling for further mixing. Other modes of handling the material will be readily apparent to those familiar with the art of preparing elastomeric or thermoplastic containing materials, the procedure being selected to produce thorough mixing of the ingredients so that, theoretically, each particle of ferrite

is covered by the thermoplastic resin. The proportions of the ingredients may be altered and other known plasticizers and stabilizers may be employed without loss of

the desired magnetic strength and flexibility 5 in the composition. For example, another suitable composition comprises the following:—

	<i>Material</i>	<i>Parts by weight</i>	<i>Percentage of Total Weight</i>
10	Polyvinyl chloride	100	6.40
	Dicetyl phthalate	80.9	5.17
	Lead carbonate paste	6.10	0.39
	Low molecular weight polyethylene	3.64	0.23
15	Lead stearate paste	1.7	0.11
	Barium ferrite powder	1371.4	87.70
		1563.47	100.00

A further specific example of a suitable composition is:—

	<i>Material</i>	<i>Parts by weight</i>	<i>Percentage of Total Weight</i>
20	Polyvinyl chloride	100	5.76
	Dioctyl phthalate	80.9	4.66
	Lead carbonate paste	10.0	0.58
	Lead stearate paste	1.7	0.10
25	Paraffin wax	5.0	0.29
	Barium ferrite powder	1536.0	88.50
	Butylated hydroxy toluene	2.0	.11
		1735.6	100.00

In this example, the paraffin wax is employed in place of polyethylene as a lubricant for the extrusion operation. In addition, it aids in reducing heat build-up on the mill during the mixing operation. The butylated hydroxy toluene serves as an antioxidant to prevent breakdown of the dioctyl phthalate.

The proportion of the ferrite to the thermoplastic resin may be varied by providing the ferrite within the range of 85% to 93% the total weight with corresponding alteration in the other ingredients to provide magnetic material of suitable characteristics for use in refrigerator gaskets. Within this range of variation the ingredients other than the ferrite may be provided as a master batch or mixtures based upon any of the above or equivalent formulations and a suitable amount of this master batch is used with the appropriate amount of ferrite to produce the aforementioned percentage of ferrite in the final composition. This eliminates the need for recomputing the individual amounts of each of the separate components when the amount of ferrite is altered within the range stated.

The magnetic material prepared as described above is preferably extruded as a continuous strip of rectangular cross section with the width of the strip being in the range of one-fourth to one-half inch and with the cross sectional area of the strip being .04 to .08 square inches for gaskets

of the size commonly employed in domestic refrigerators. Such a strip, when magnetized, will produce sufficient magnetic attraction to hold itself against a magnetically permeable article such as the metal body of a refrigerator and thereby permits the door of the refrigerator to be held closed, but to be opened with a pull thereon which is of the order of ten pounds or less. The magnetic material in strip form may be readily inserted in the pocket or compartment of the gasket by slipping the strip therein with the strip cut or broken to a length corresponding substantially to the length of one reach of the complete gasket. Separate lengths of gasket material for the separate reaches of the cabinet may thus be prepared and united together at the corners by known sealing operations, such as dielectric heating or the like. To facilitate retaining the gasket material in proper shape during this operation, the pockets or compartments immediately adjacent the corners of the completed gasket may be filled with glass wool or other material, it not being necessary that the magnetic strip extend completely to the corners of the gasket.

All four sides of the completed gasket may be provided with magnetic strips in the manner just described. However, it has been found that, with certain types of hinges now employed on refrigerator cabinets, it is desirable that the reach of the

gasket adjacent the hinges not be provided with a magnetic strip. This reach of the gasket may therefore have the pocket or compartment 21 filled with glass wool or other readily deformable resilient material as is indicated at 26 in Figs. 1 and 3 of the drawing. Also, in some instances it is sufficient to have only the vertical reach of the gasket opposite the hinge side of the door provided with magnetic material in which event the upper and lower reaches of the gasket as well as the reach adjacent the hinges may be supplied with glass wool or the like.

The arrangement of the magnetic poles for the magnetic material 16 may be selected to provide the desired holding action of the magnet. One suitable arrangement is that in which continuous north and south poles are provided running respectively adjacent the longitudinal edges of the strip 16 with the magnetizing force supplied to the strip so that the maximum energy imparted in the magnetizing operation is on that surface of the magnet which will be outermost when placed in the gasket. Other arrangements of magnetic poles may be provided as for example, a plurality of poles alternating across the width of the magnet or lengthwise of the magnet. Likewise, in some instances, it may be desirable to have a plurality of magnetic poles with those of like polarity either alternating or adjacent each other. These several arrangements of magnetic poles can be readily effected because of the nature of the magnetic material which does not exhibit the properties of a steel bar when magnetized but instead permits local magnetization to be effected in accordance with any desired pattern.

A flexible magnetic material may be employed for use other than in refrigerator gaskets. In such uses it may not be necessary to provide the same magnetic strength as required for the strips employed in a refrigerator gasket and greater flexibility may be desired. Consequently, the percentage of ferrite may be reduced below the range mentioned above and suitable magnets may be prepared wherein the ferrite is present in the range of 30% to 93% of the total weight of the magnet. Thermoplastic resins other than polyvinyl chloride may be employed in forming the magnets as, for example, a copolymer of vinyl chloride with other monomers such as vinyl acetate, vinylidene chloride, methyl acrylate and similar materials. Likewise, the barium ferrite may be replaced, if desired by other ferrites or equivalent magnetic retentive properties, so that a permanent magnet can be produced by a magnetizing operation.

WHAT WE CLAIM IS:—

1. A flexible magnet comprising finely divided particles of barium ferrite or a ferrite of equivalent magnetic retentive properties, the ferrite being bonded together by a thermoplastic resin containing a plasticiser so as to make up a self-supporting body of minimum dimension greater than the thickness of a magnetic recording tape, the body being magnetised in such a manner and to such a degree as to constitute a permanent magnet able to hold itself against a magnetically permeable article, the particles being present in the body in the range of 30% to 93% of the total weight of the magnet and the size of the particles being such that they all pass through a screen the openings of which have a transverse dimension of the order of 0.0017 inches.

2. A flexible magnet according to Claim 1, in which the size of the particles of ferrite is of the order of a few microns.

3. A magnet according to Claim 2 in which the particle size is of the order of 3 to 4 microns.

4. A magnet according to any of the previous claims, in which the particles of ferrite are present in the range of 85% to 93% of the total weight of the magnet.

5. A magnet according to any of the previous claims, in which the thermoplastic resin is polyvinyl chloride.

6. A magnet according to Claim 5, in which a stabilizer for the polyvinyl chloride is included.

7. A magnet according to any of the previous claims, in which the magnet is in the form of an elongated strip.

8. A magnet according to Claim 7, in which the cross-sectional area of the strip is in the range of 0.04 square inches to 0.08 square inches.

9. A gasket for the door of a refrigerator or other cabinet, comprising an elongated flexible body having a longitudinally extending portion for attaching to the door, a portion carrying a flexible magnet for attracting the cabinet body, this magnet being in accordance with any of the previous claims and extending along the body, and an intermediate portion which is integral with the other portions and which permits of a relative movement between them to allow the magnet to take up different longitudinal configurations with respect to the attaching portion.

10. A gasket according to Claim 9, in which the intermediate portion comprises two spaced, longitudinally extending walls, one being connected to the magnet-carrying portion adjacent one side of the magnet and the other being connected to this portion adjacent the other side of the magnet.

11. A gasket according to Claim 9 or Claim 10, in which the body is hollow and

the magnet is disposed in its interior.

12. A gasket according to any of Claims 9 to 11, in which the magnet is fitted in a pocket having walls integral with the body.

5 13. A gasket according to Claims 10 and 12, or 10 to 12, in which the pocket is disposed adjacent the sealing wall of the body and remote from the said spaced walls of the body and the attaching portion.

10 14. A gasket for the door of a refrigerator or other cabinet, comprising an elongated flexible body having integral front, back and side walls defining a hollow interior of generally rectangular shape in cross-section, the back wall being integral with a parallel facing extension and serving with it as a portion for attaching the gasket to the door, the front wall being integral with further walls to define an internal longitudinally extending pocket lying behind the front wall and carrying a flexible magnet for attracting the cabinet body to the front wall, the magnet being in accordance with any of Claims 1 to 8 and extending along the body, the two side walls serving to permit of relative movement between the front and back walls to allow the magnet to take up different longitudinal configurations with respect to the attaching portion.

15 20 25 30 15. A gasket according to any of Claims 9 to 14 in which the magnet extends along substantially the whole length of the body.

35 16. A cabinet with a door which, when closed, is held against the cabinet body by a gasket according to any of Claims 9 to 14, the gasket being an endless gasket which serves as a seal between the door and the periphery of the cabinet body around its opening.

40 17. A cabinet according to Claim 16, in

which the gasket is secured to the door.

18. A cabinet according to Claim 16 or Claim 17, in which the magnet extends around only part of the periphery of the cabinet body around its opening, the gasket 45 for the remainder of the periphery providing no force urging the door and cabinet body together.

19. A cabinet according to Claim 18, in which the flexible body of the gasket is uniform throughout its length, and the portion thereof not provided with a magnet contains a mass of readily deformable resilient non-magnetic material. 50

20. A cabinet according to Claim 19, in which the material is glass wool. 55

21. A cabinet according to any of Claims 18 to 20, in which the door is a rectangular hinged door, and the portion of the gasket not provided with a magnet extends at least 60 along the edge of the periphery adjacent the hinge.

22. A cabinet according to any of Claims 16 to 21 and constructed as a refrigerator.

23. A magnet according to Claim 1, substantially as described with reference to Figure 4 of the accompanying drawings. 65

24. A gasket according to Claim 9, substantially as described with reference to Figure 4 of the accompanying drawings. 70

25. A cabinet or refrigerator substantially as described with reference to Figures 1 to 3 of the accompanying drawings.

For the Applicants:—

GILL, JENNINGS & EVERY,

Chartered Patent Agents,

51/52 Chancery Lane,

London, W.C.2.


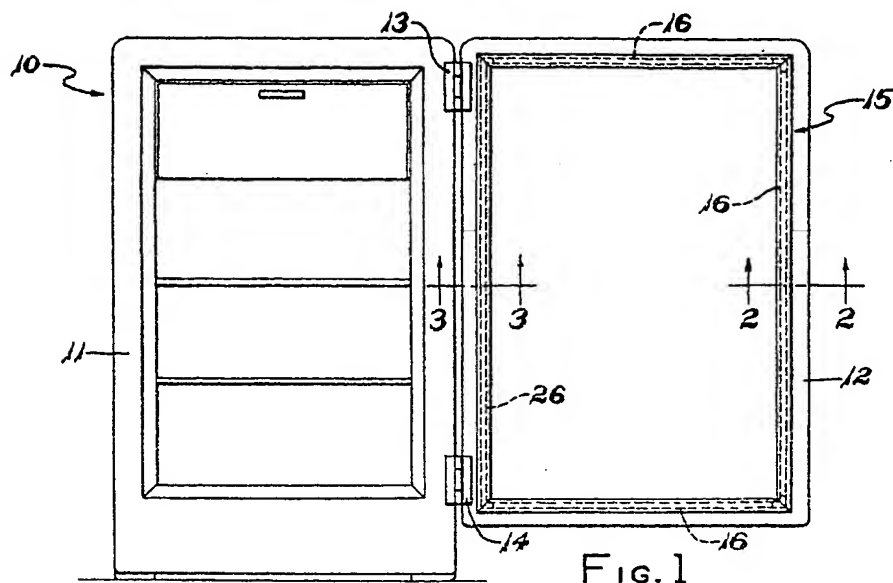


Fig.3




Fig. 2

